

- Versatile compact electronic sounder
- Supplied complete with sealed gland and 3m cable
- Adjustable tone and volume (32 options)
- Compatible with alarm output of WS-15A Display
- Configurable via WS-15A Display as either high or low wind speed alarm
- High sound output
- Low current consumption
- Surface mounting via fixing screws
- Optional magnetic feet for alternative quick mounting (at extra cost)




DESCRIPTION

This multi tone alarm unit is supplied with 3m of cable to connect to the WS-15A display unit.

Sound selection is via an internal 5 way DIL switch.

When connected to the WS-15A Display, the wind speed alarm is configurable as either a high or a low alarm and to avoid false alarm events, there are adjustable hold off and hold on times as shown below:

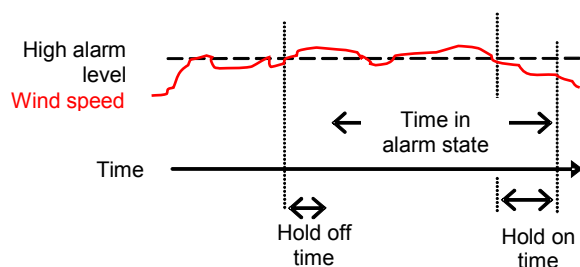

SPECIFICATION

Physical	Mounting	Surface mounted
	Dimensions	Width: 100mm
		Depth: 80mm
Weight	0.25 kg	
Performance	Sound output	up to 104dB(A) @ 1m
	Volume adjustment	18dB(A)
	Sound tones	32 adjustable by internal switch setting
Power	Power requirements	12 to 35 V dc at 25mA
	Connection	Internal terminals
Environmental	Operating temperature	-25 to +40 °C
	Storage temperature	-40 to +70 °C
	Relative humidity	95% at 40 °C
	Sealing	IP65 rated

The manufacturer reserves the right to amend the specification and therefore the information in this document may be subject to change. Please check our website www.r-p-r.co.uk for details

Richard Paul Russell Ltd

New Harbour Building, Bath Road, Lymington SO41 3SE, UK
 tel +44 (0) 1590 679755 fax +44 (0) 1590 688577 e-mail: sales@r-p-r.co.uk web: www.r-p-r.co.uk