

Wind System FLASHING LED BEACON


- Red flashing visual alarm
- High light intensity
- Supplied complete with sealed gland and 3m cable
- Compatible with alarm output of WS-15A Display
- Configurable via WS-15A Display as either high or low wind speed alarm
- Low current consumption
- An alternative to an audible alarm
- Long life LED design
- Suitable for indoor and outdoor use



DESCRIPTION

This flashing beacon alarm unit is supplied with 3m of cable to connect to the WS-15A display unit.

When connected to the WS-15A Display, the wind speed alarm is configurable as either a high or a low alarm and to avoid false alarm events, there are adjustable hold off and hold on times as shown below:

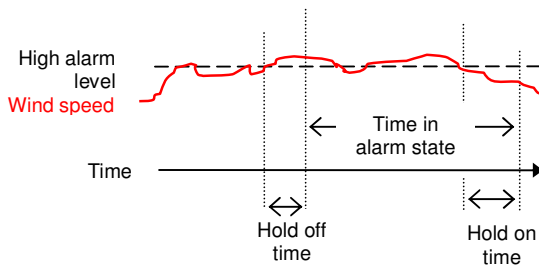

The unit can be surface mounted via fixing screws. Alternatively, optional magnetic feet may be used for quick mounting (at an additional cost).

SPECIFICATION

Physical	Mounting	Surface mounted
	Dimensions	Width: 90mm
		Height: 90mm
		Depth: 81mm
Material	ABS plastic enclosure	
Weight	0.25 kg (including 3m cable)	
Output	Flashing frequency	1 per second (optional 2 per second)
Power	Power requirements	20-40mA at 12Vdc
	Connection	Internal terminals
Environmental	Operating temperature	-25 to +40 °C
	Storage temperature	-40 to +70 °C
	Relative humidity	90% at 40 °C
	Sealing	IP65 rated

The manufacturer reserves the right to amend the specification and therefore the information in this document may be subject to change. Please check our website www.r-p-r.co.uk for details

Richard Paul Russell Ltd

New Harbour Building, Bath Road, Lymington SO41 3SE, UK
tel +44 (0) 1590 679755 fax +44 (0) 1590 688577 e-mail: sales@r-p-r.co.uk web: www.r-p-r.co.uk